


Orora is an economical prepainted material yet offers high corrosion resistance, consistent quality and wide range of colour selection.

Orora
COATING SYSTEM

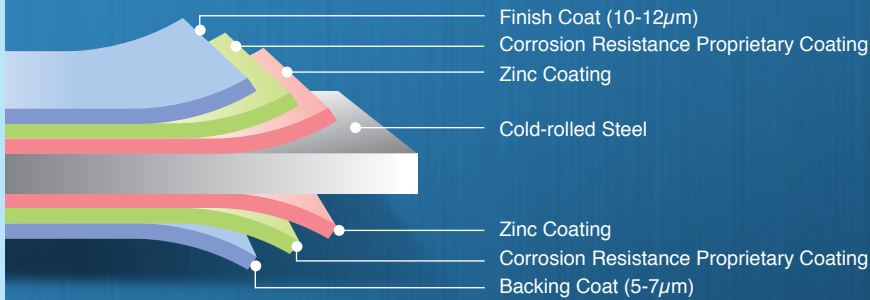

PRODUCT SPECIFICATION

Available Thickness	0.176 - 0.30mm
Zinc Coating Mass	Z08
Dry Film Thickness	10-12µm on topside, 5-7µm on reverse side
Finish Coat	Standard / Custom formulated polyester paint
Backing Coat	*Leaden Grey / Shadow Grey

T-Bend	Max 6T
Reverse Impact	Min 8J
Hardness	Min 2H
Cross Erichsen	No peel off


*Please refer to FIW Steel colour chart for colour viewing.

APPLICATIONS

For residential or industrial roofing, cladding and fencing.

RANGE OF STANDARD COLOURS

This colour chart represents the range of available colours, but custom colour matches are available within the limits of durable colour pigments.

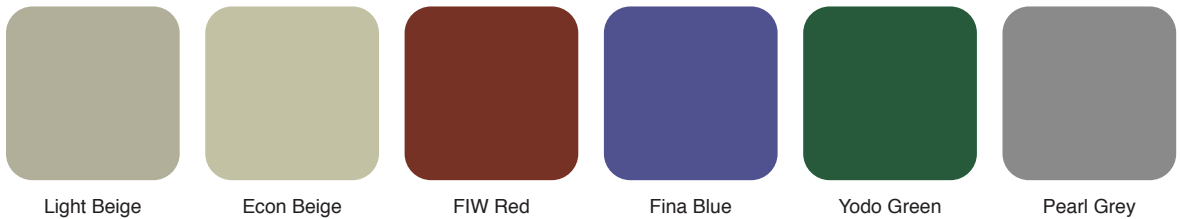

ADVANTAGES



WARRANTY

*5 years warranty against perforation. **Subject to terms & conditions*